

 ICOM

HF/50/144/430 MHz MULTIMODE
PORTABLE TRANSCEIVER

IC-705

Be Active!

In the field with the IC-705



HF to 430 MHz Multiband and Multimode Includes “Base Station” performance and features in the palm of your hand


HF/50/144/430 MHz Multimode

From HF to 50/144/430 MHz, you can enjoy a variety of bands in the D-STAR DV, SSB, CW, RTTY, AM and FM modes. The IC-705 receives continuously from 30 kHz through the 144 MHz band. You can also enjoy FM broadcast and air band reception.

RF Direct Sampling System


The IC-705 employs an RF direct sampling system, where RF signals are directly converted to digital data. Then processed in the FPGA (Field-Programmable Gate Array), making it possible to simplify the circuit construction as well as reducing internal noise that can mask weak signals.

* The down-conversion IF sampling method is used for 25 MHz and above.

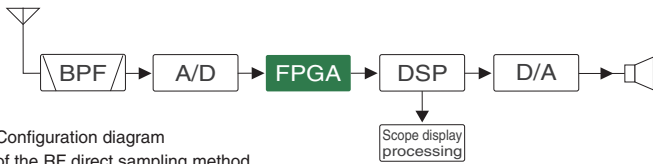

Configuration diagram of the RF direct sampling method

Real-Time Spectrum Scope and Waterfall Display

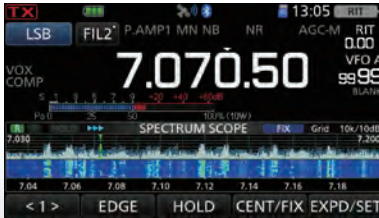

Display example of real-time spectrum scope and waterfall

Performance seen with the IC-7300 and IC-9700 spectrum scope is at the tip of your fingers for field operation. You can quickly see band activity as well as finding a clear frequency, all in the compact radio and not as an expensive add-on.

Large Touch Screen Colour Display

The large 4.3" colour TFT touch LCD, same size as the IC-7300 and IC-9700, offers intuitive operation of functions, settings, and various operational visual aids, such as the band scope, waterfall, and audio scope functions.



Touch screen display



Menu screen example

Compact and Lightweight Design



“Base Station” performance in the palm of your hand! You will quickly see how this compact radio is rugged, for outdoor use, in a small, lightweight package, weighing approximately 1.1 kg.

BP-307/BP-272 Li-ion Battery Pack or 13.8 V DC External Power Supply



BP-307 attached (Rear panel view)

Utilizing the high capacity Li-ion battery from the ID-52E and ID-51E handheld radios. A 13.8 V DC external power supply can be used for operation and charging of the BP-307/BP-272.



roducing the D-STAR DV and.



* Antenna and antenna connector are not included.

Be Active!
In the field with the IC-705

Maximum Output Power 5 W (Battery), 10 W (13.8 V DC)

In portable mode, the IC-705 has the maximum output power of 5 W from the BP-307 which can last approximately 4.5 hours*. This is perfect for true 5 W QRP as well as the 0.5 W QRPp operations. Once you setup with a 13.8 V DC power source, you have up to 10 W.

* TX : RX : Standby = 1 : 1 : 8 (The Power Save function ON, in the FM mode)

WLAN/Bluetooth® Technologies Bluetooth®

Utilize WLAN/Bluetooth® technologies for linking and remote control, for a true wireless operation. The VS-3 headset (optional) enables more comfortable operation via Bluetooth®.

GPS Functions

An internal GPS receiver and antenna enhance your operations by providing location logging*, RX/TX locations via D-PRS, "Near Me" repeater search/scan, QSO recording with metadata*, and internal clock synchronization.

* A microSD memory card is required.

microSD Card Slot

The microSD card slot enables the storage of user profiles, QSO recording, TX voice memory keyer, RTTY logging, GPS data, screen capture, firmware upgrades, and programming.


Micro USB Connector

In addition to the two COM ports, radio control plus audio, the IC-705 can be charged via the micro USB port.



Actual size

D-STAR Functions



Enjoy the latest DV mode features with the IC-705. Have direct access to the D-STAR network with Terminal/Access point modes. Additionally, the IC-705 has the Photo Share feature introduced with the IC-9700. Share photos, without the need of a computer with other uses with an IC-705 and IC-9700.



Optional Automatic Antenna Tuner, AH-705



AH-705
Optional Automatic
Antenna Tuner

The optional AH-705 covers 1.8 MHz to 50 MHz bands with a 30 m or longer wire antenna*. It has a SO-239 antenna connector for use with a 50 Ω antenna such as dipole or Yagi. The AH-705 is a compact design with 190 × 105 × 40 mm and can be neatly fit into the LC-192 backpack. Working with two alkaline batteries and IP54 dust-protection and water resistance are useful for field operation.
* 7 m or longer antenna for 3.5 – 54 MHz

Optional Backpack, LC-192, Ideal for Field Operations



LC-192
Multi-function backpack

Designed to be the "Ultimate", must have accessory for the IC-705, the LC-192 is the perfect utility backpack. Features like a safety strap, with a 1/4"-20 mounting lug to keep the IC-705 from accidentally falling out of the custom radio compartment, to the user adjustable internal panels for custom compartments for antennas, battery packs, or other items necessary for an afternoon SOTA activation.

HF/50/144/430 MHz MULTIMODE
PORTABLE TRANSCEIVER

IC-705

SPECIFICATIONS

GENERAL		
	Receiver	0.030–199.999*, 400.000–470.000**
Frequency coverage* (Unit: MHz)	Transmitter	1.810–1.999 3.500–3.800 7.000–7.200
		10.100–10.150 14.000–14.350 18.068–18.168
		21.000–21.450 24.890–24.990 28.000–29.700
		50.000–52.000 144.000–146.000 430.000–440.000
Mode	USB, LSB, CW, RTTY, AM, DV, FM, WFM (Rx only)	
No. of memory channels	500 regular (100 groups), 25 scan edges, 4 call (2 ch x 2 bands) channels	
Antenna connector	BNC connector (50 Ω)	
Power supply requirement	13.8 V DC ±15% (with external power supply) 7.4 V/7.2 V DC (With specified Icom's battery pack)	
Operating temperature range	–10°C to +60°C	
Frequency stability	Less than ± 0.5 ppm (–10°C to +60°C)	
Frequency resolution	1 Hz	
Current drain	External DC power (at 13.8 V) Icom's battery pack (at 7.4 V)	
	TX (Max. power)	Less than 3 A (10 W) Less than 2.5 A (5 W)
	RX (Max. audio)	0.5 A (typical) 0.8 A (typical)
	RX (Standby)	0.3 A (typical) 0.5 A (typical)
Dimensions (WxHxD, projections not included)	200 × 83.5 × 82 mm	
Weight (approximate)	1.1 kg (including BP-307)	

*1 Showing the EUR version. Varies according to the version.
*2 Some frequency bands are not guaranteed.

TRANSMITTER		
Output power	External DC power (at 13.8 V) Icom's battery pack (at 7.4 V)	
	SSB/CW/RTTY/FM/DV	0.1 – 10 W 0.1 – 5 W
	AM	0.025 – 2.5 W 0.025 – 1.25 W
Modulation system	SSB : Digital PSN modulation, AM : Digital low power modulation FM : Digital reactance modulation, DV : Digital GMSK modulation	
Spurious emissions	Less than –50 dB (HF), Less than –60 dB (50 MHz), Less than –60 dB (144/430 MHz)	
Carrier suppression	More than 50 dB	
Unwanted sideband	More than 50 dB	

RECEIVER				
Receiver system	0.030–24.999 MHz RF Direct Sampling			
Intermediate frequencies	25 MHz and above Down Conversion IF Sampling			
	25 MHz and above: 38.85 MHz±0.5 MHz			
Sensitivity (HF: Preamp-1 ON, 50 MHz: Preamp-2 ON, 144/430 MHz: Preamp ON)	SSB/CW (10 dB S/N)	–	0.20 μV	0.15 μV
	AM (10 dB S/N)	13.0 μV	2.0 μV	1.0 μV
	FM (12 dB SINAD)	0.5 μV (28.000–29.700 MHz)	0.25 μV	0.18 μV
	DV (1% BER)(PN9)	1.0 μV (28.000–29.700 MHz)	0.63 μV	0.35 μV
Sensitivity for RED version (HF: Preamp-1 ON, 50 MHz: Preamp-2 ON, 144/430 MHz: Preamp ON)	SSB (BW=2.4 kHz)	10 dBμV emf	0 dBμV emf	–6 dBμV emf
	AM (4 kHz, 60% modulation)	16 dBμV emf	6 dBμV emf	0 dBμV emf
	FM (7 kHz, 60% modulation)	0 dBμV emf (28.000 to 29.700 MHz)	–6 dBμV emf	–6 dBμV emf
Selectivity (Filter: SHARP)	More than		Less than	
	SSB (BW=2.4 kHz)	2.4 kHz/–6 dB	3.4 kHz/–40 dB	
	CW (BW=500 Hz)	500 Hz/–6 dB	700 Hz/–40 dB	
	RTTY (BW=500 Hz)	500 Hz/–6 dB	800 Hz/–40 dB	
	AM (BW=6 kHz)	6.0 kHz/–6 dB	10 kHz/–40 dB	
	FM (BW=15 kHz)	12.0 kHz/–6 dB	22 kHz/–40 dB	
	DV (12.5 kHz spacing)	Less than –50 dB		
Spurious and image rejection ratio (SSB/CW/AM/FM)	HF	More than 70 dB* (except for ADC aliasing)		
	50 MHz	More than 70 dB*		
	144 MHz	More than 65 dB		
	430 MHz	More than 54 dB		
	* At intermediate frequency in 25–30 MHz or 50–54 MHz: More than 50 dB			
Audio output power	Internal SP	More than 530 mW (12 Ω load at 10% distortion)		
	External SP	More than 200 mW (8 Ω load at 10% distortion)		


All stated specifications are subject to change without notice or obligation.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries. The Bluetooth® word mark and logos are registered trademark owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. Android is a registered trademark or a trademark of Google LLC. iOS is a trademark or a registered trademark of Cisco in the U.S. and other countries and is used under license. Windows is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries. ALPHA ANTENNA is a trademark of Productive Industries LLC. All other trademarks are the properties of their respective holders. This product includes "zlib", "libpng" and real-time OS "RTX" open source software, and is licensed according to the open source software license. D-STAR (Digital Smart Technology for Amateur Radio) is a digital radio protocol developed by JARL (Japan Amateur Radio League).

Supplied Accessories

- HM-243 Speaker microphone
- BP-307 Battery pack
- OPC-2421 DC power cable

Side Panel View

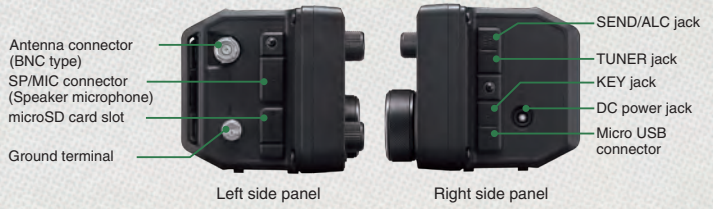

Optional Accessories

- AH-705 Automatic antenna tuner
- BC-202IP2 Rapid charger (AC adapter BC-123S is supplied with the BC-202IP2 depending on the versions.)
- BC-123S AC adapter for BC-202IP2
- BP-272 Li-ion battery pack 7.4 V, 2000 mAh (typ.)
- BP-307 Li-ion battery pack 7.2 V, 3150 mAh (typ.)
- CP-22 Cigarette lighter cable for BC-202IP2, 12 V/24 V DC
- CP-23L Cigarette lighter cable for BC-202IP2, 12 V DC
- CS-705 Programming software for Windows®*
- HM-243 Speaker microphone
- OPC-2421 DC power cable
- OPC-2417 Data cable (Micro USB - Micro USB)
- OPC-2418 Data cable (USB Type C - Micro USB)
- OPC-2474 Control cable (5 m) for AH-705
- OPC-2475 Coaxial cable (5 m) for AH-705 (BNC connectors)
- RS-BA1 Version 2 IP remote control software
- RS-MS1A Remote control software for Android™*
- RS-MS1I Remote control software for iOS™*
- RS-MS3A Remote control software for Android™*
- RS-MS3W Remote control software for Windows®*
- ST-4001A Picture utility software for Android™*
- ST-4001I Picture utility software for iOS™*
- ST-4001W Picture utility software for Windows®*
- ST-4003A Time Adjustment Software for Android™*
- ST-4003W Time Adjustment Software for Windows®*
- VS-3 Bluetooth® headset

* Download free software

Preferred Partner Product

- AL-705 QRP Portable Magnetic Loop Antenna 10 – 40 meter (7.0 – 29.7 MHz) by Alpha Antenna™
Deployed Diameter: 67 cm
Stored Size: 25 × 28 × 6 cm
Antenna Weight: 860 g

* For purchasing, please contact your local Icom dealer.



MBF-705 installation image



• MBF-705 Desktop Stand



• LC-192 Multi-function backpack

Visit our website for more details on the LC-192



Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.com

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com

Icom Brazil
E-mail: sales@icombrazil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com